rotronic

Datenblatt - Fiche technique - Data sheet

11.99.8754

VALUE USB 2.0 Kabel, USB A ST – Micro USB B ST, 0,8m

VALUE Câble USB 2.0, USB A mâle – Micro USB B mâle, 0,8m

VALUE USB 2.0 Cable, USB Type A M – Micro USB B M, 0.8 m

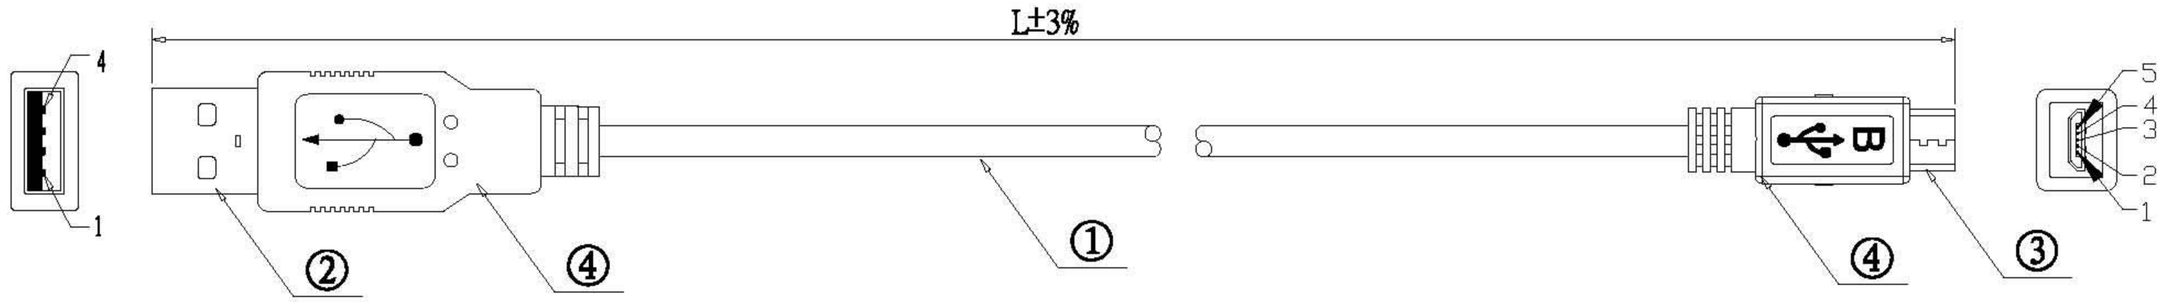

MARKING: AWM E200765 STYLE 2725 60℃ 30V 1P/28AWG AND 2C/28AWG USB FT2

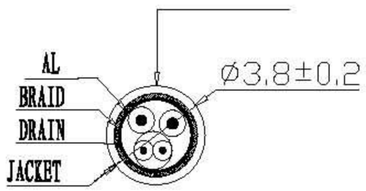

SECTION
A-A



Pin Assignment

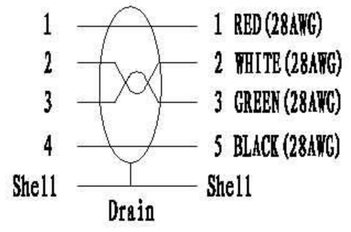

ITEM NO	QTY	DESCRIPTION	COLOR
11.99.8752	10	VALUE USB2.0 Cable, TypeAM-Micro BM, 1.8m	white
11.99.8754	10	VALUE USB2.0 Cable, TypeAM-Micro BM, 0.8m	white
11.99.8755	10	VALUE USB2.0 Cable, TypeAM-Micro BM, 3.0m	white

Note:

1. Conductor material: Bare copper
2. Braid material: AL-MG braiding
3. Drain material: Tinned copper wire

NO	P/N	DESCRIPTION	QTY	UNIT
④	MOLDING	OUTER MOLD: 45P PVC COLOR, white	9	G
③	USB-MICRO B	USB MICRO B MALE CONNECTOR FLASH GOLD ; NICKEL PLATED SHELL	1	SET
②	USB-AM	USB AMALE CONNECTOR FLASH GOLD ; NICKEL PLATED SHELL	1	SET
①	CABLE	USB CABLE 28AWG/1P+28AWG/2C+AL+BRAID(48*0.12mm AL-MG braiding) +Drain(7*0.12 Tinned copper wire) PVC JACKET OD: 3.8±0.2mm , COLOR: WHITE 433#	L	M

REMARK	NO	CHA.NO	SIGNATURE	DATE
DRAWN BY	MORGAN			
CHECKED BY				
AUDITED BY		APPROVED BY	QIJUNJIEN	
CRAFT		DATE	2010.12.30	

SIGN		W.T	SCALE
PAGE	OF		

Rotronic Co.,Ltd.

USB AM/BMICRO-XXX

USB.AM.MICRO.XX.3